

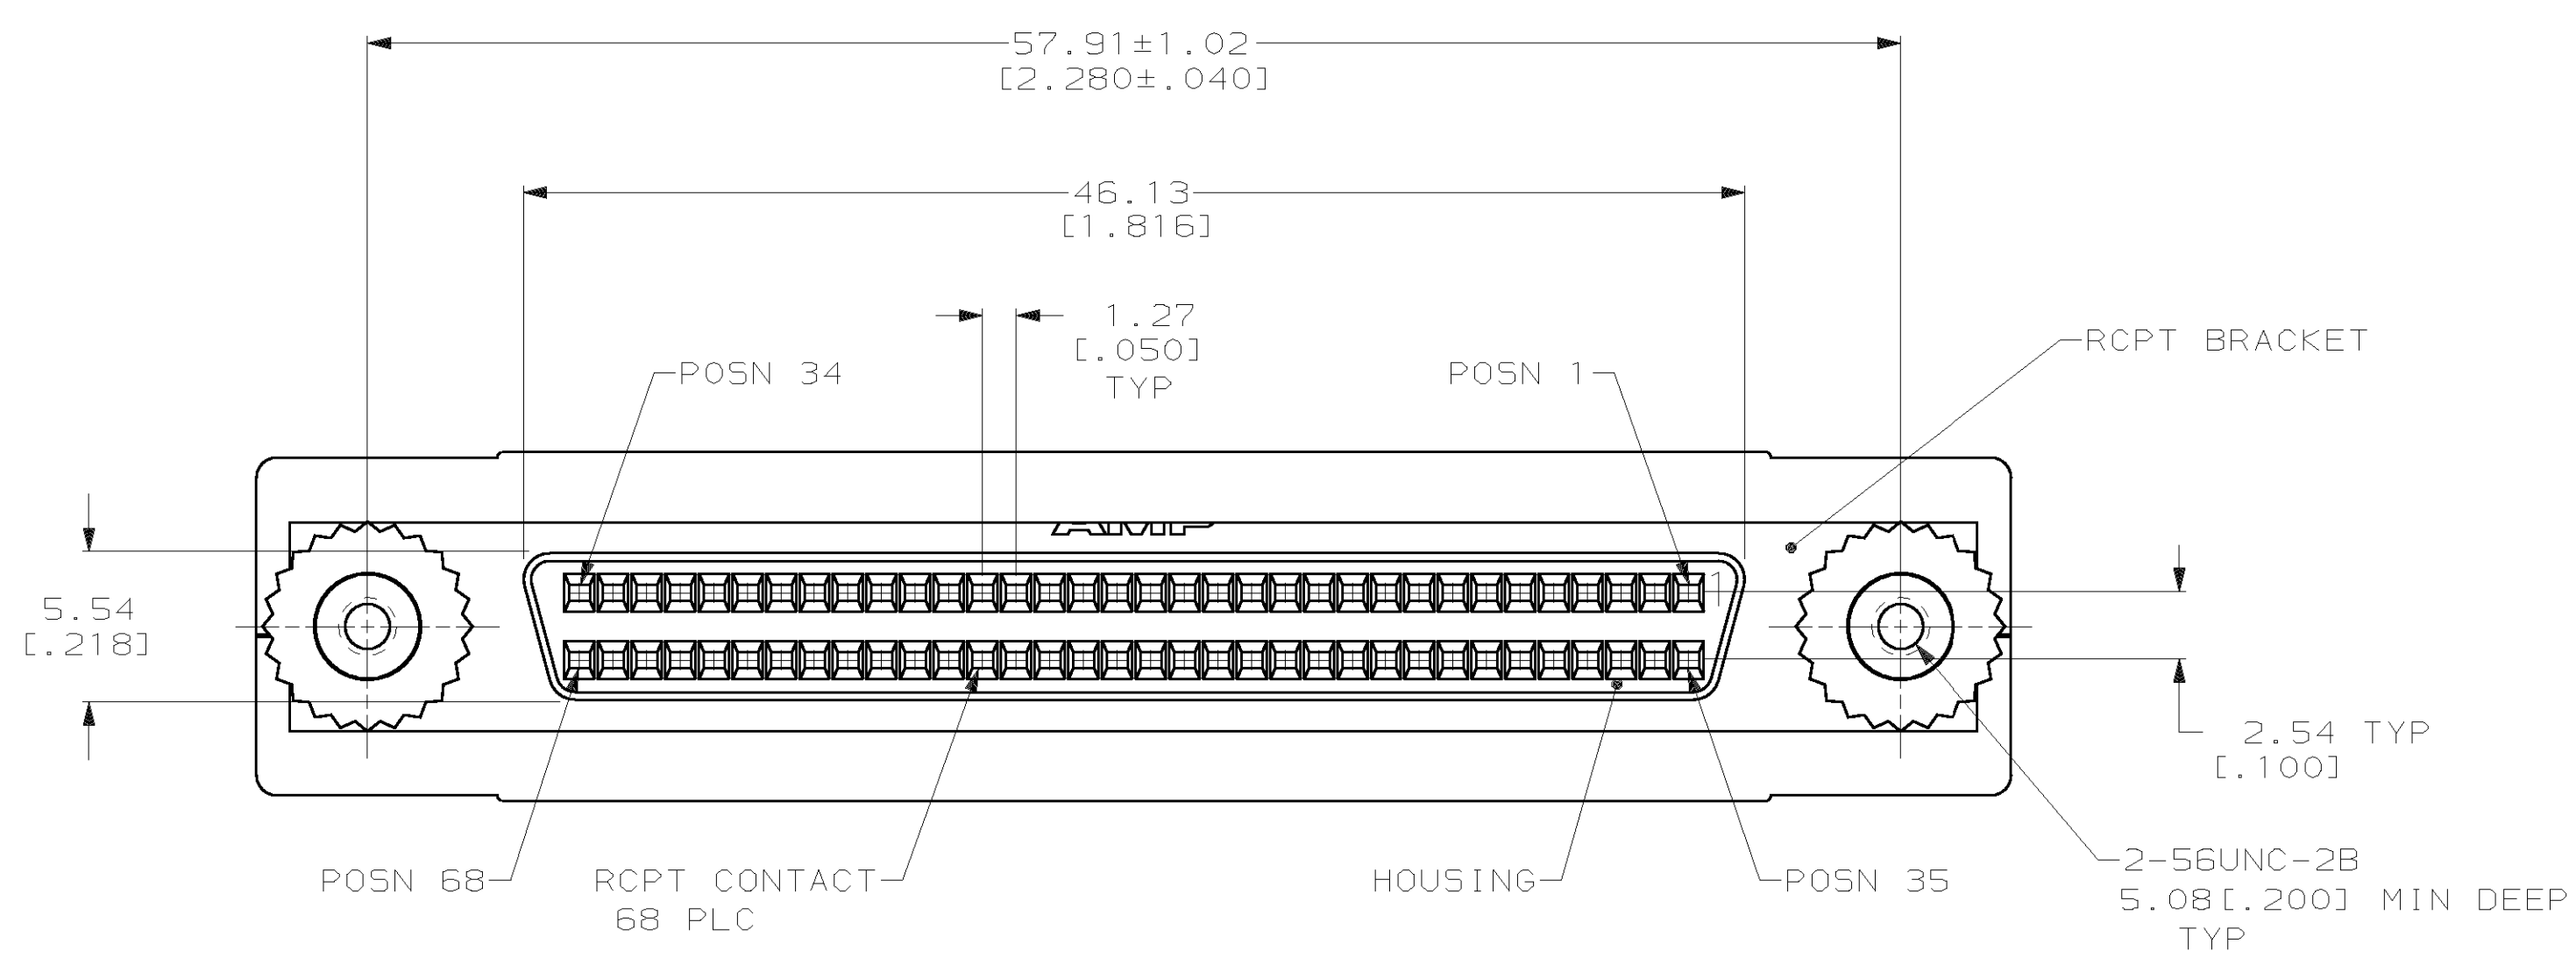
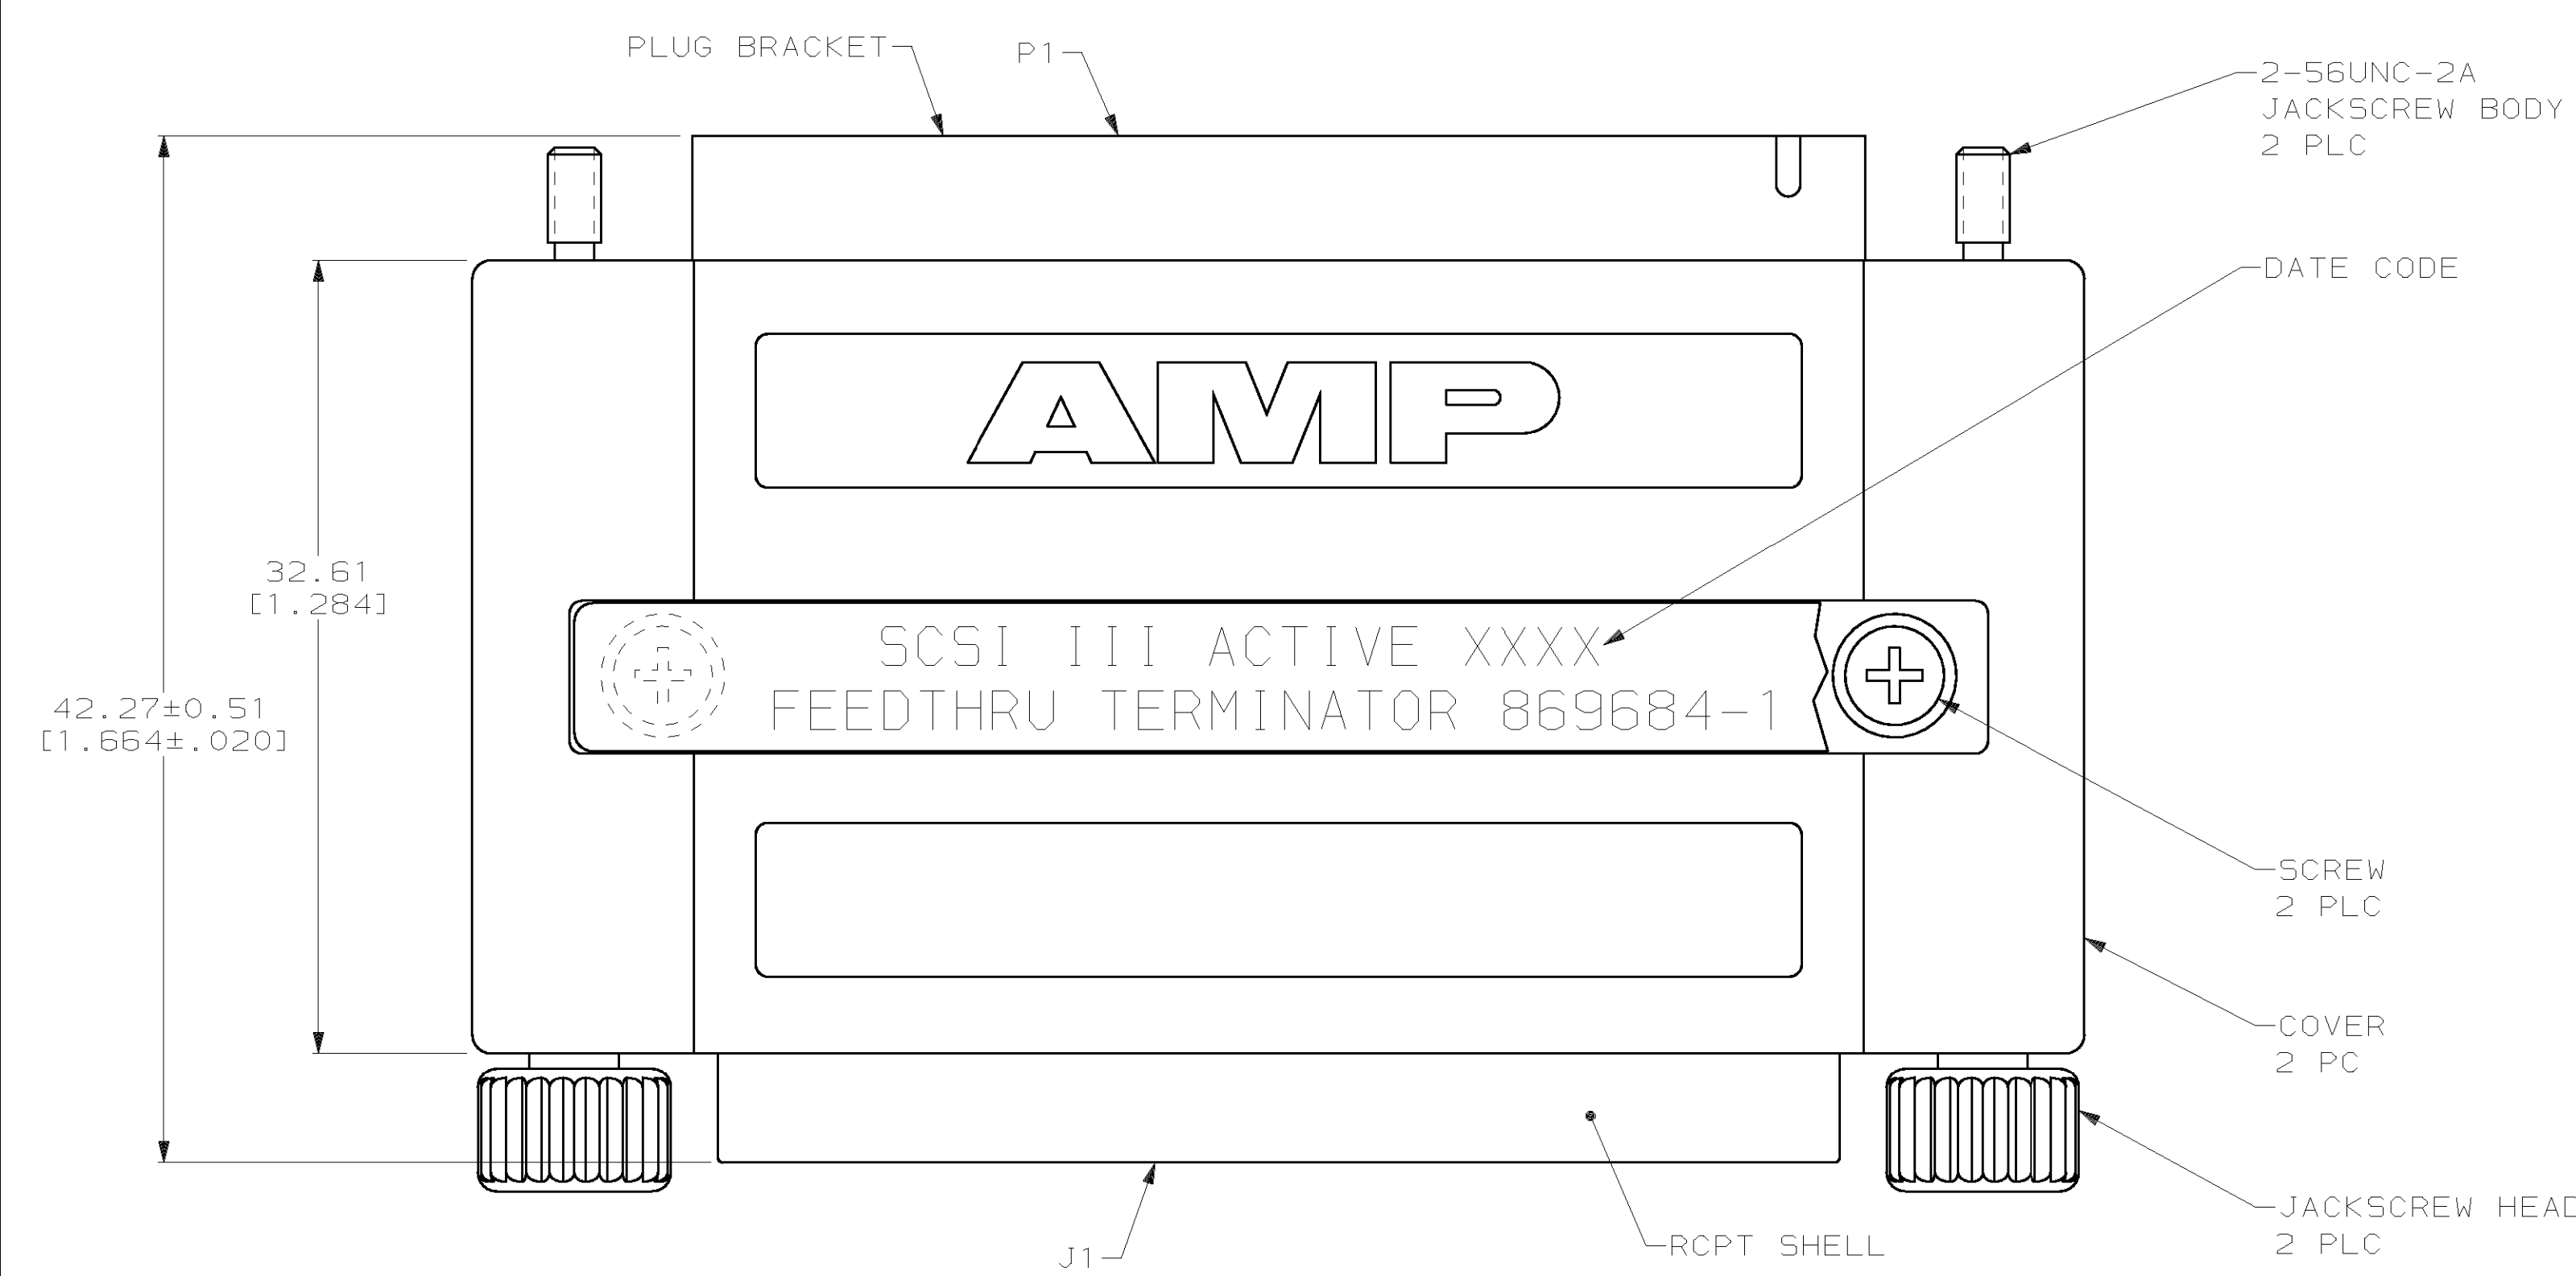


LOC		DIST		P		ZONE		LTR		REVISIONS			
BD	62									DESCRIPTION	DATE	APPD	
										F	REVISED PER EC 051A-0043-99	23AUG99	JG

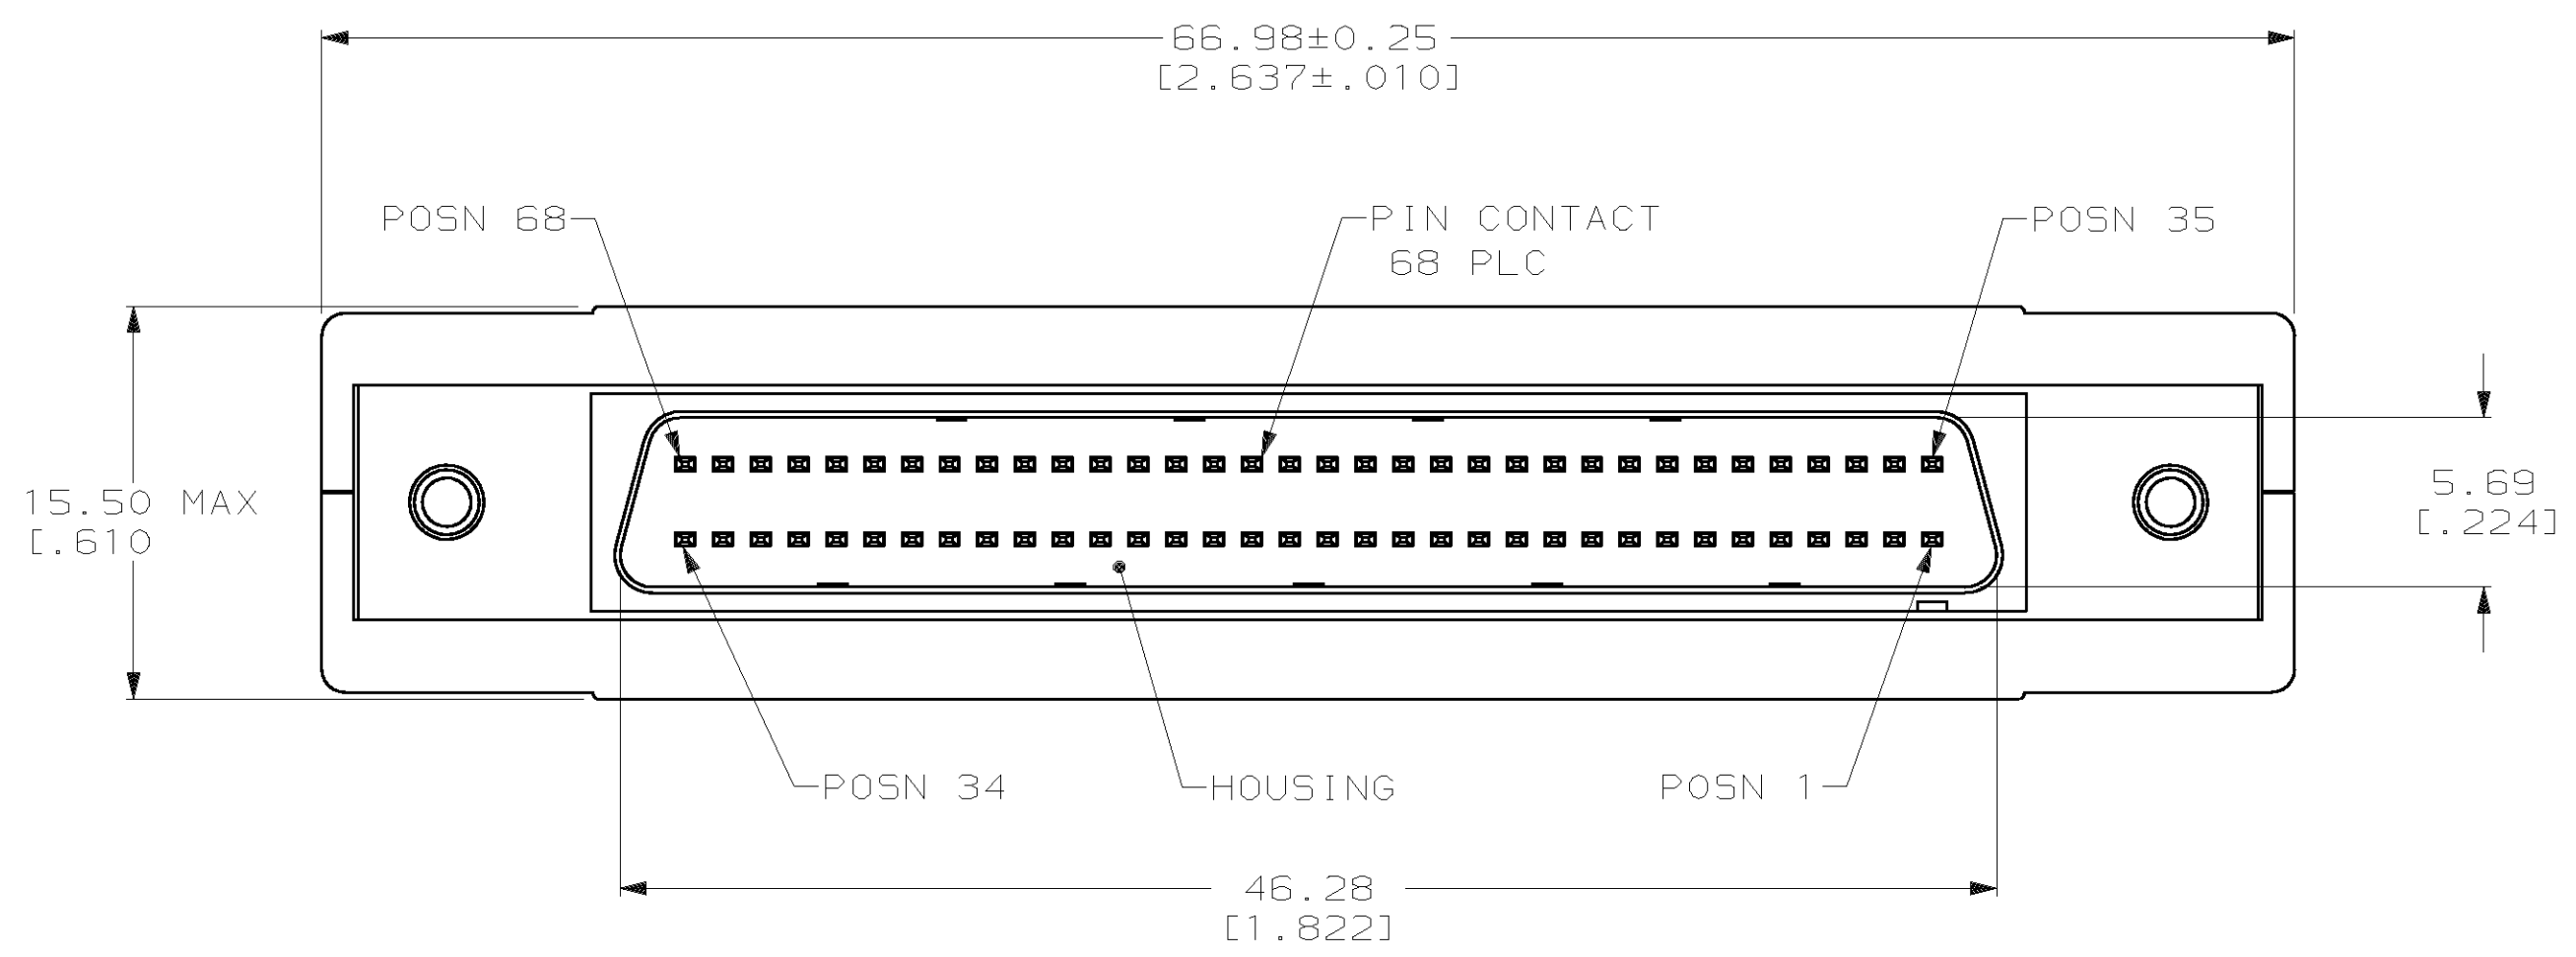

- 1 JACKSCREW BODIES: STAINLESS STEEL; SHELL AND SCREWS: CARBON STEEL; CONTACTS: PHOSPHOR BRONZE; HOUSINGS: POLYESTER, BLACK; SHIELD: COPPER; COVER: ABS, GREY, UL 94V-0; JACKSCREW HEADS: PVC, BEIGE; BRACKETS: ZINC; FLEX FILM CIRCUIT: COPPER ON KAPTON.
- 2 PASSIVATED.
- 3 5.08μm [.000200] MIN TIN OR TIN-LEAD OVER 1.27μm [.000050] MIN COPPER.
- 4 PIN CONTACTS: 0.76μm [.000030] MIN GOLD FOR A LENGTH OF 3.35 [.132] MIN FROM MATING END OVER 1.27μm [.000050] MIN NICKEL; RECEPTACLE CONTACTS: 0.76μm [.000030] MIN GOLD FOR A LENGTH OF 0.64 [.025] MIN, 0.13 [.005] MAX FROM MATING END OVER 1.27μm [.000050] MIN NICKEL.
- 5 76.20μm [.003000] MIN CARBONITRIDE TEMPER.
- 6 3.81μm [.000150] MIN NICKEL OVER 5.08μm [.000200] MIN COPPER.
- 7 C2, C3, AND C4: 4.7μFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; C1: 2.2μFD TANTALUM CAPACITOR RATED 15 VOLTS MIN; CAPACITOR TOLERANCE: ±20%; U1, U2, AND U3: DS2107AS.

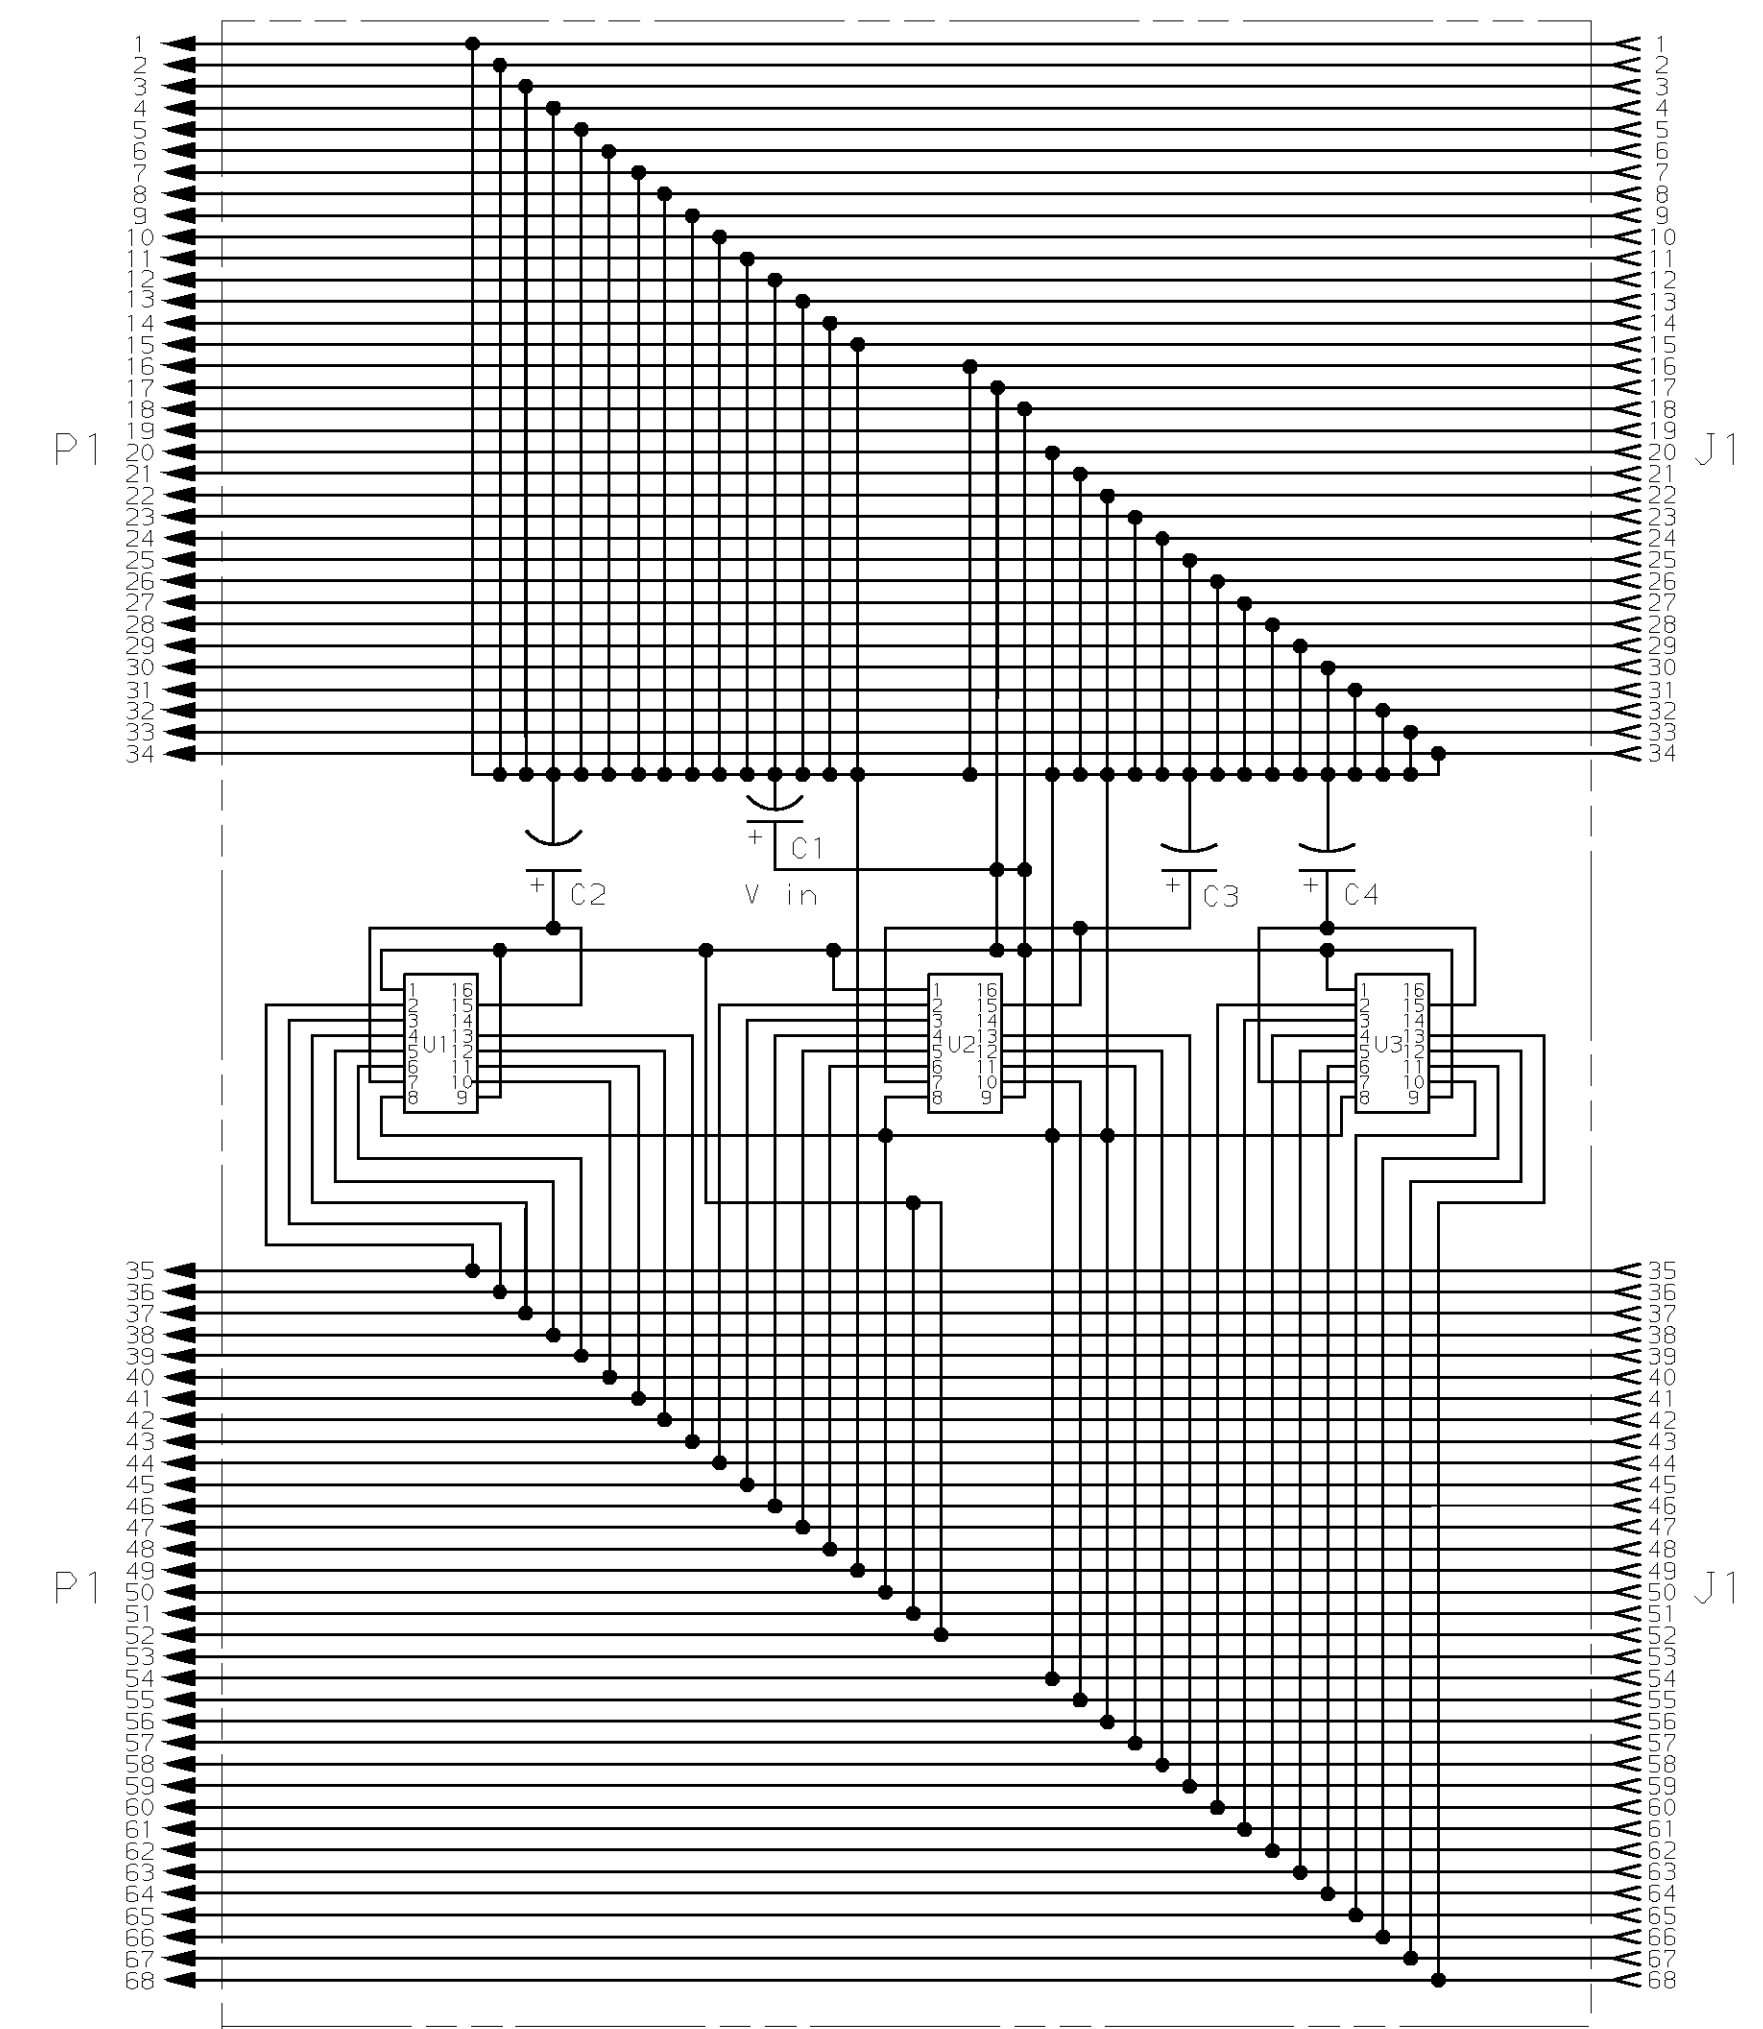

SCHEMATIC

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± 0.13 [.005] ANGLES ± -		DR 2-3-93 J McCLINTON	869684-1 PART NO		
MATERIAL	FINISH	CHK 2-10-93 R. STONE	AMP Incorporated Harrisburg, PA 17105-3608		
PRODUCT SPEC	APPLICATION SPEC	APPD 2-15-93 W.D. FLESHMAN	NAME ADAPTER ASSEMBLY, FEEDTHRU, ACTIVE, SCSII III, .050 SERIES AMPLIMITE™, TERMINATOR		
WEIGHT	SCALE	APPD 2-15-93 W.D. FLESHMAN	SIZE D	CAGE CODE 00779	DRAWING NO C-869684
JACKSCREW BODIES: 1	CONTACTS: 4		SCALE 4:1	SHEET 1 OF 1	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.